





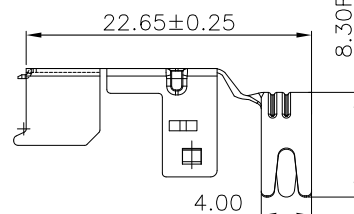


半成品



后壳



SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4

50mΩ Max for other contacts

Mechanical Characteristics:

Mating Force:35 Newtons.Maximum

Unmating Force:10 Newtons.Minimum

8N Min After Durability

MATERIAL:

Housing: SEE TABLE 94V-0 COLOR:BLUE

Contact: copper alloy (T=0.25mm)

Shell: SPCC

PLATING:

Contact: Au Plated on contact area





Tin Plated on solder area

Nickel underplating over all

Shell: SEE TABLE

operating Temperature:-55° to+85°

前壳

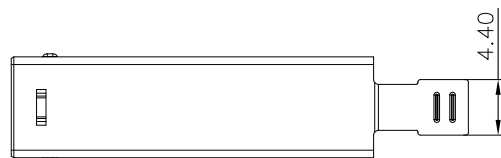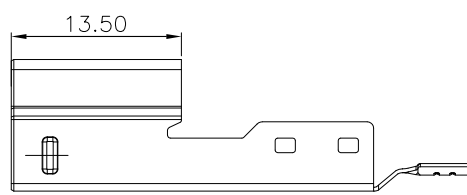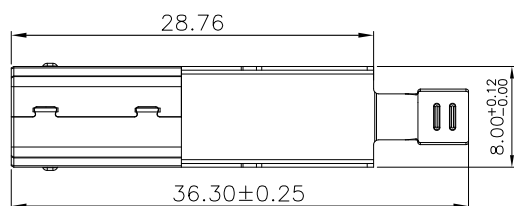

料号备注

CU	3	M	013	S	XX	XX	XX	XX
----	---	---	-----	---	----	----	----	----

00=胶芯后塞PBT蓝 前后壳镀镍	P=PACK-P0031
01=胶芯PBT蓝 后塞LCP黑 前后壳镀镍	A=PACK-P0002
02=胶芯后塞PBT蓝 前后壳镀金	
03=胶芯后塞PBT蓝 前壳镀金 后壳镀镍	
04=胶芯PBT黑后塞PBT蓝 前后壳镀镍	
05=PBT蓝,前壳喷码	R=ROHS2.0标准
06=胶芯PBT蓝,后塞LCP黑	W=无卤+ROHS2.0
前壳镀金,后壳镀镍	H=REACH标准
	B=盐雾24H
	C=盐雾48H



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED
TOLERANCES

X. +/- METRIC 0.35
.X +/- 0.25
.XX +/- 0.25

FRACTIONS +/-
ANGLES +/- 2.00°

DIMENSIONS
(METRIC) (MM)

APPROVAL

制图 Elaine

审核

核准

文件位置

ANGLE OF PROJECTION



日期

2019.08.30

品名

规格

料号

字张

A4

比例

1 : 1

状态码

A

USB 3.0 BM焊线三件套(OD=6.0)

SEE TABLE

工程图号:

DWG-USBBM-001

版本:

A5

页数 1 OF 2