

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A1	ECN160719001	共模主体图面增加“△”符号 已便统一辨识	WANG JIN BAO	—	—	16-07-19
B0	ECN180223001	Increase the packing P/N	Leiny	BENDEE	BENDEE	18-02-23
B1	ECN180908002	修改产品包装料号	Jody	BENDEE	JOBS	18-09-08

SPECIFICATIONS:

1.Electrical Performance:

1.1 Contact current Rating:

0.5 Amperes per pin minimum for signals.

1.5 Amperes per pin minimum for VBUS

1.2 Dielectric Withstanding Voltage: AC 100V(RMS)

1.3 Insulation resistance:100Megohms Minimum.

1.4 Contact Resistance:

Initial: 30mΩ Max for mated connector

final(after stress)50mΩMax

2.Mechanical Characteristics:

2.1 Mating Force: 35 Newtons.Maximum

2.2 Unmating Force: 15 Newtons.Minimum.

2.3.Durability :25 cycles done at a max rate
for 200 cycles per hour

3.MATERIAL:

4.1 Housing: PBT+30%GF&PA66+30%GF 94V-0

4.2 Contact: copper alloy

4.3 Cover : LCP+30%GF 94V-0 COLOR:BLACK

4.PLATING:

contact : Au plated on contact area

Tin plated on solder tail area

Nickel underplating over all

5.operating Temperature: -55°to+85°

6. "⊙" SHOWS FAI MEASUREMENT POINT.

7. "△" SHOWS Modify MEASUREMENT POINT.

料号备注

CI	3	F	046	S	XX	X	XX	X	X
----	---	---	-----	---	----	---	----	---	---

A=PACK-P0013△
P=PACK-P0005

12=半金雾锡1U"
13=半金雾锡3U"
14=半金雾锡5U"
15=半金雾锡15U"
16=半金雾锡30U"

R=ROHS2.0标准
W=无卤+ROHS2.0
H=REACH标准






B=盐雾24H
C=盐雾48H


00=PBT蓝色300C不加色



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名规格	3.0 IDC 20PIN FEMALE (D款高频焊 T=5.25)
X. +/-	METRIC 0.50	制图 Jody	2018.09.08	料号	SEE TABLE
.X +/-	0.30	审核		文件位置	
.XX +/-	0.25	核准		字张	工程图号:
FRACTIONS +/-	2.00"	文件位置		A4	DWG-IDC20-046
ANGLES +/-		ANGLE OF PROJECTION		版本.	B1
DIMENSIONS				比例	1 : 1
(METRIC)	(MM)			状态码	A
				页数	1 OF 1

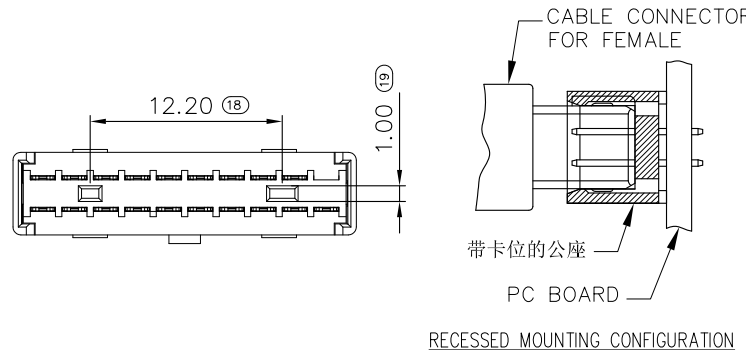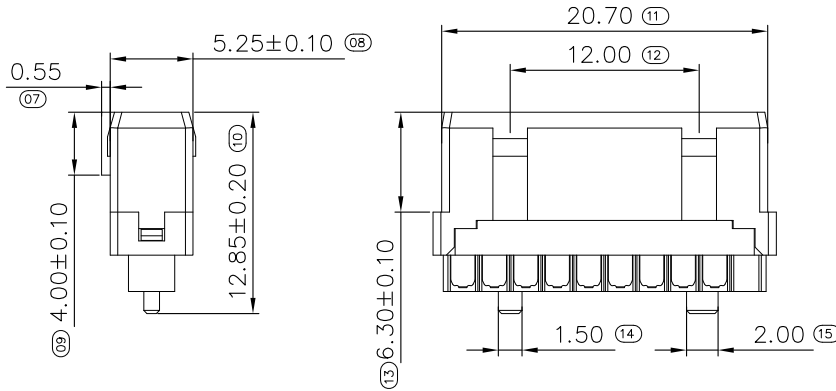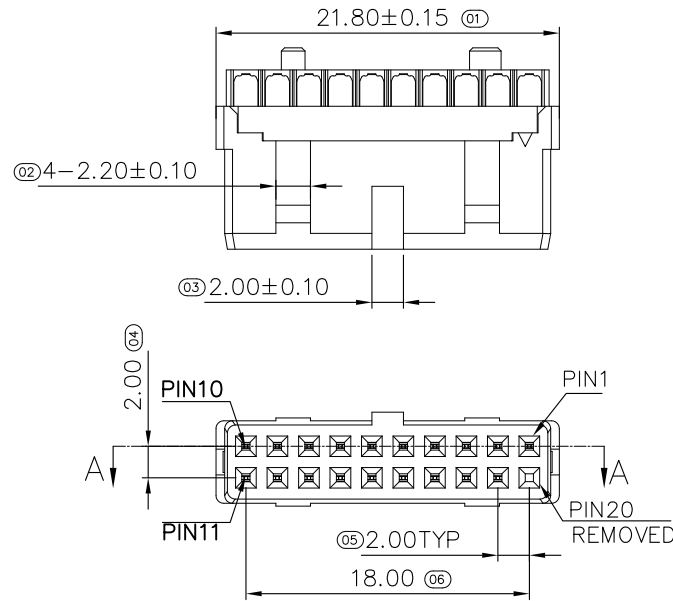

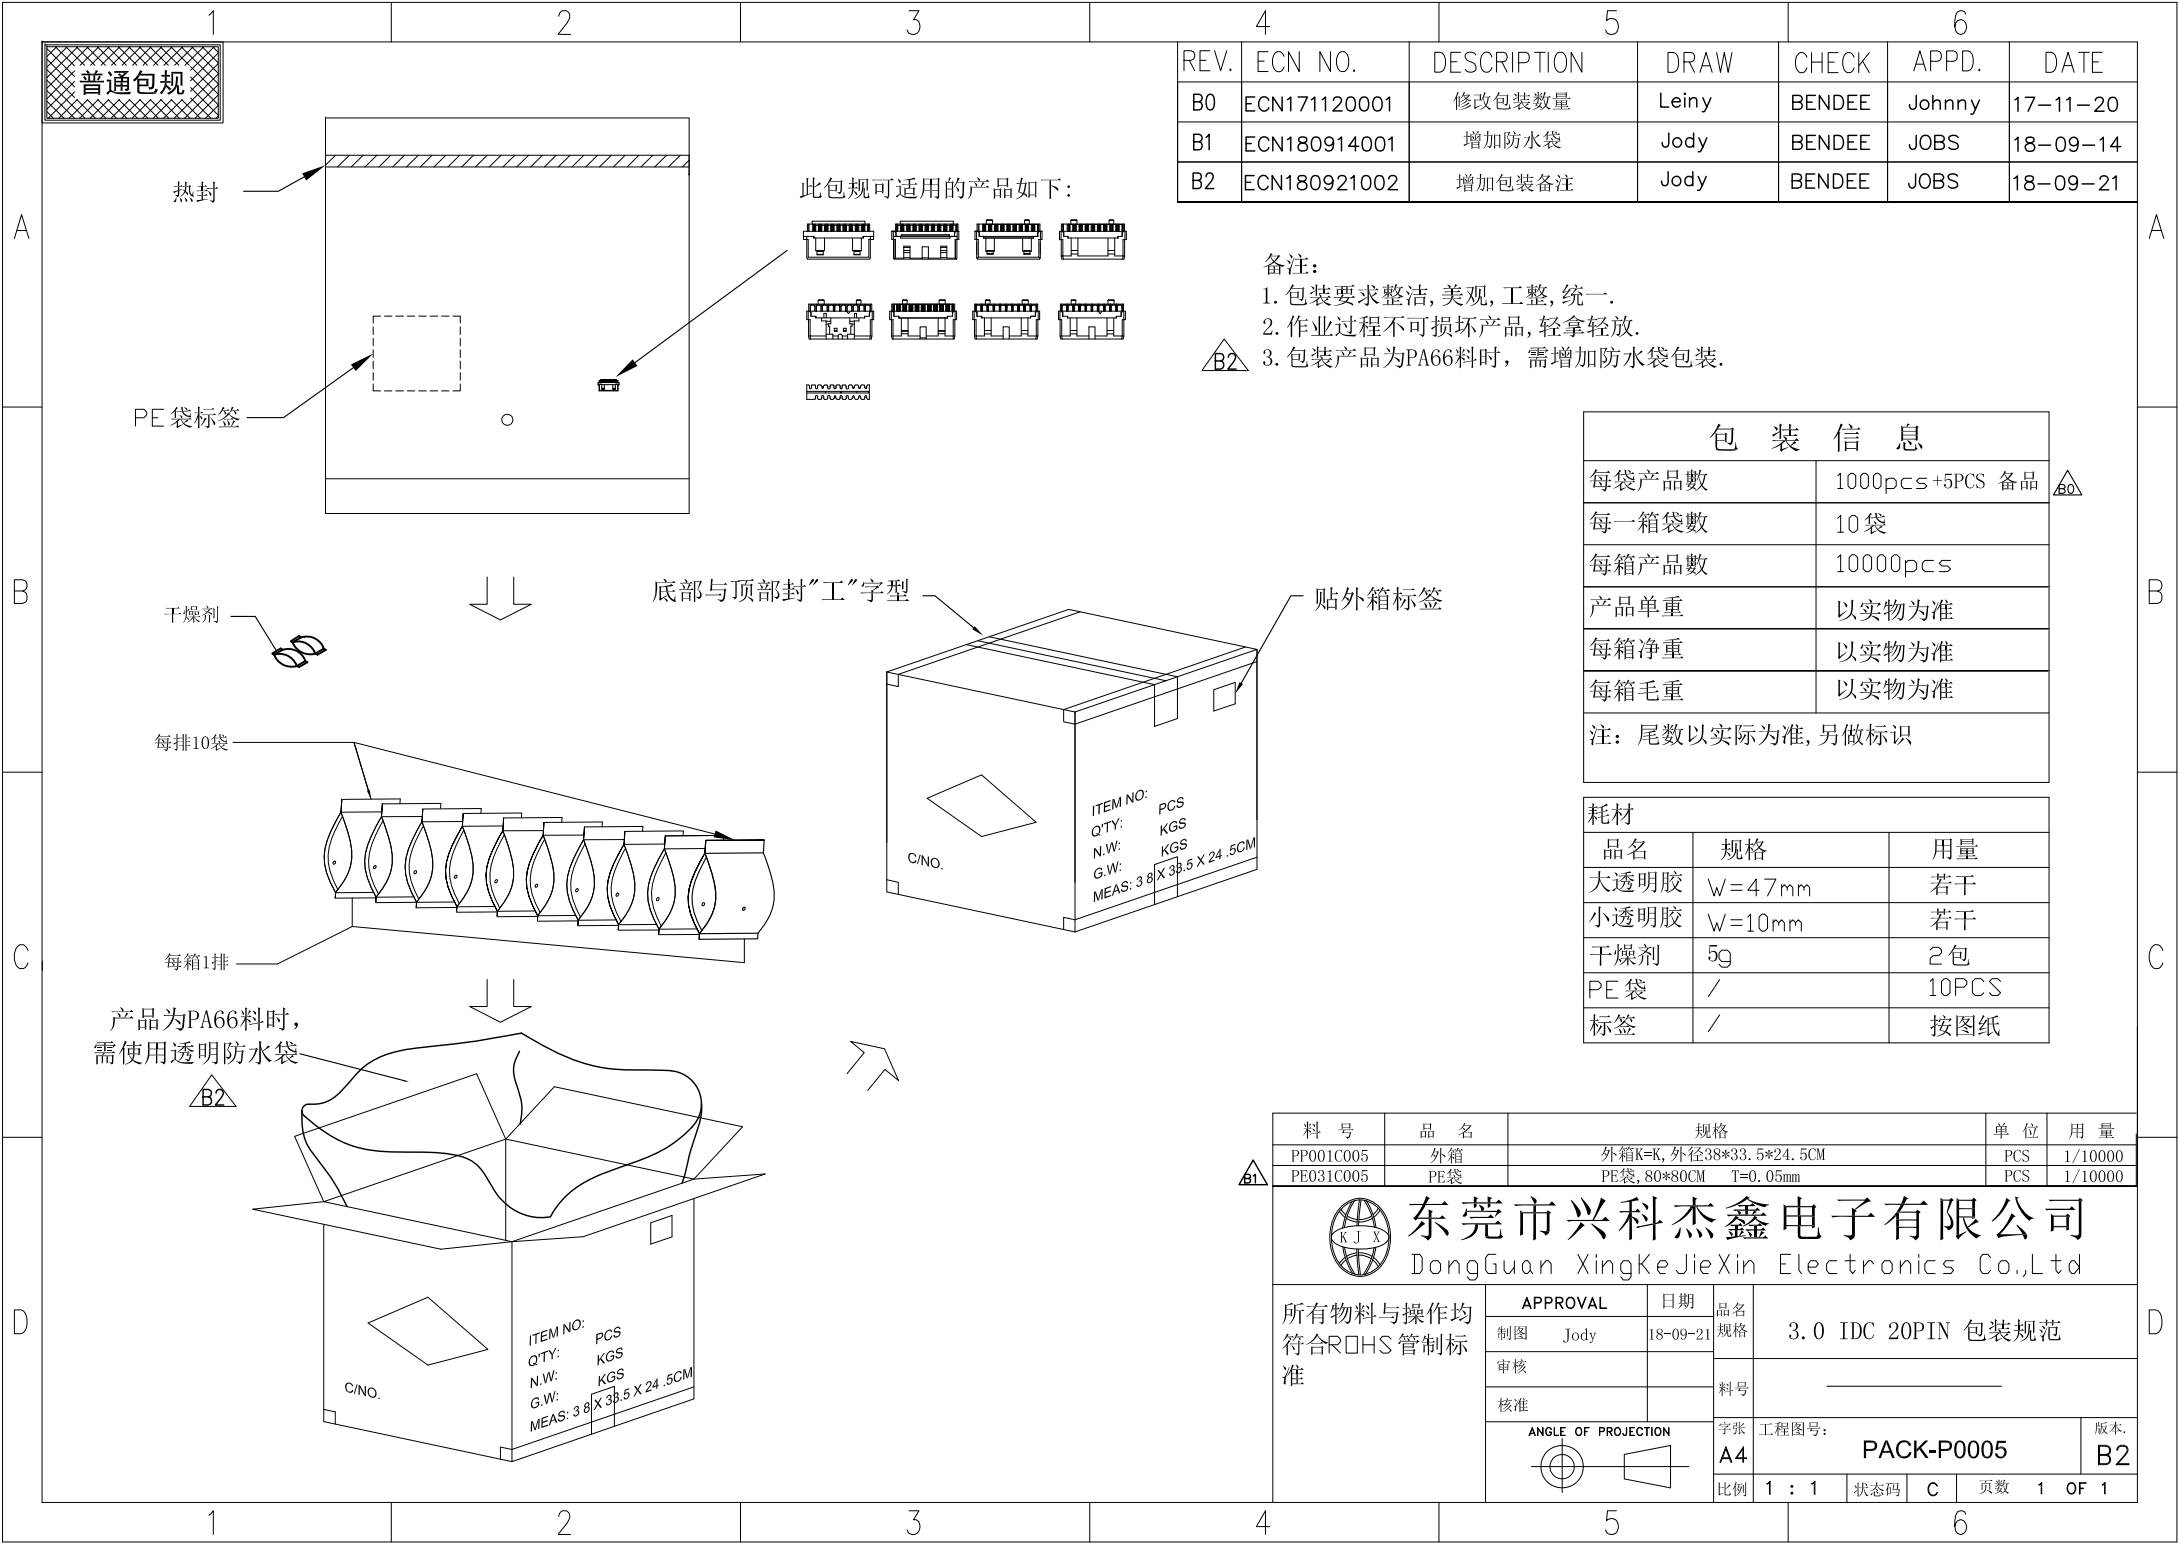

1	2	3	4	5	6
A	普通包规 热封 PE 袋标签 干燥剂 每排10袋 每箱1排 产品为PA66料时，需使用透明防水袋 底部与顶部封“工”字型 贴外箱标签 此包规可适用的产品如下： △B2	REV. ECN NO. DESCRIPTION DRAW CHECK APPD. DATE B0 ECN171120001 修改包装数量 Leiny BENDEE Johnny 17-11-20 B1 ECN180914001 增加防水袋 Jody BENDEE JOBS 18-09-14 B2 ECN180921002 增加包装备注 Jody BENDEE JOBS 18-09-21 备注： 1. 包装要求整洁, 美观, 工整, 统一. 2. 作业过程不可损坏产品, 轻拿轻放. 3. 包装产品为PA66料时, 需增加防水袋包装.	包 装 信 息 每袋产品数 1000pcs+5PCS 备品 每一箱袋数 10 袋 每箱产品数 10000pcs 产品单重 以实物为准 每箱净重 以实物为准 每箱毛重 以实物为准 注：尾数以实际为准, 另做标识 耗材 品 名 规格 用量 大透明胶 W=47mm 若干 小透明胶 W=10mm 若干 干燥剂 5g 2 包 PE 袋 / 10PCS 标签 / 按图纸	料 号 品 名 规格 单 位 用 量 PP001C005 外箱 外箱K=K, 外径38*33.5*24.5CM PCS 1/10000 PE031C005 PE袋 PE袋, 80*80CM T=0.05mm PCS 1/10000 所有物料与操作均符合ROHS管制标准 APPROVAL 日期 品名规格 制图 Jody 18-09-21 3.0 IDC 20PIN 包装规范 审核 料号 核准 字 张 工程图号： 版本. ANGLE OF PROJECTION A4 PACK-P0005 B2 比例 1 : 1 状态码 C 页数 1 OF 1	
B					
C					
D					
1	2	3	4	5	6